

XAL

BO 55 basic track

GENERAL

Ceiling
Track
gold
IP20
1450 lm
Extended Configuration

LED

3000 K
CRI \geq 90
L90 / 50000 h
initial \leq 3 MacAdam

OPTICAL


Flood 38°
Medium 23°

PHYSICAL

diameter 55 mm
height 155 mm
0.45 kg
tilt max 90°
rotation 355°

ELECTRICAL

non DIM
21 W
69 lm/W
PC1 220-240V

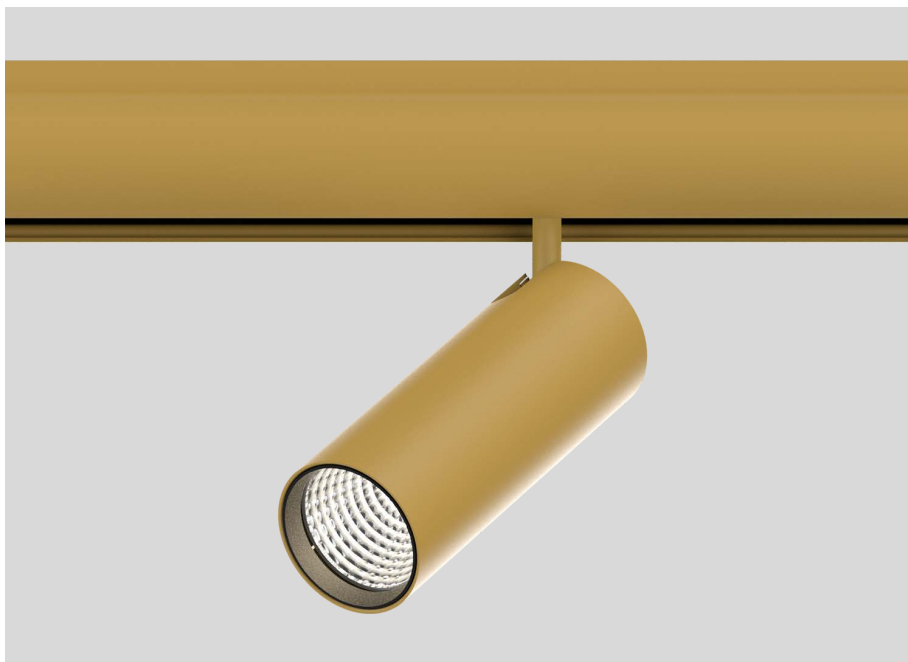

Tracked spotlight in die-cast aluminium; adapter disappears in the channel; classic style in elegant design for discerning requirements; surface gold powder coated; for continuous lighting systems; 355° rotatable and 90° tiltable; converter integrated into spotlight head; passive cooling of the LEDs through improved heat sink geometry; with COB (Chip on Board) technology for maximum efficiency; no appearance of multiple shadows; light colour 3000 K; Binning initial \leq 3 MacAdam; CRI \geq 90; min. 90% of luminous flux after 50000 operating hours; energy efficient LEDs with high CRI; including high quality aluminium reflector with spherical reflector; high gloss anodised; neutral colour reflection through absolute freedom from interference colour; for brilliant object staging; precise radiation characteristic with 23° beam; in-stalled and exchanged without tools; optical attachment available as accessory; accessories are listed separately; degree of protection IP20; PC1 220-240V; incl. converter, non dimmable; extruded aluminium profile with 3 phase track

Light Distribution

